



# TP PROP

Telescopic Steel Prop



// Safe and heavy-duty



// Table of contents



Features	2
Benefits	3
Solutions	3
Basic components	3



- ▶ Designed for **shoring horizontal formwork**, as well as for various requirements of shoring that may arise on site.
- ▶ Ideal for those jobs where **cost is key**, without compromising the high performance of the prop and with **all the guarantees** of ULMA Construction.

## // System components

- 1 Plate
- 2 Outer tube
- 3 Base plate
- 4 Inner tube
- 5 Cotter Pin
- 6 Collar Nut
- 7 Projection

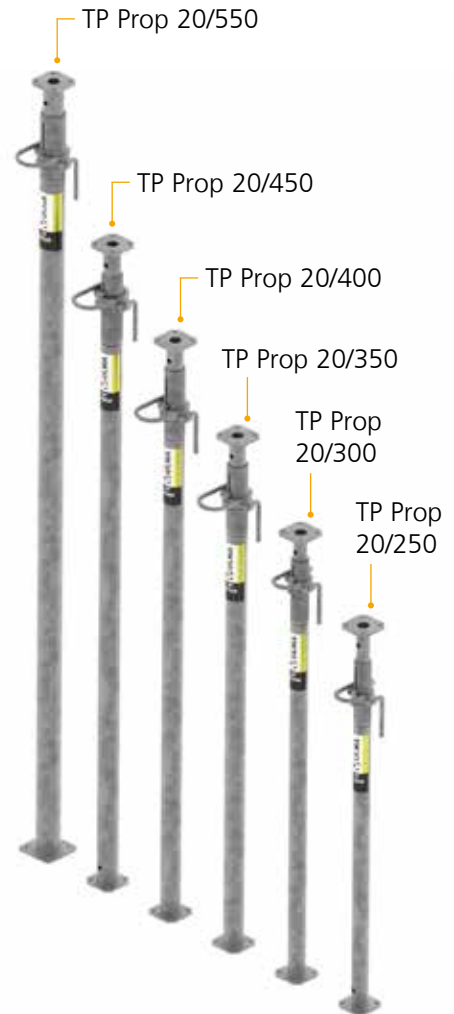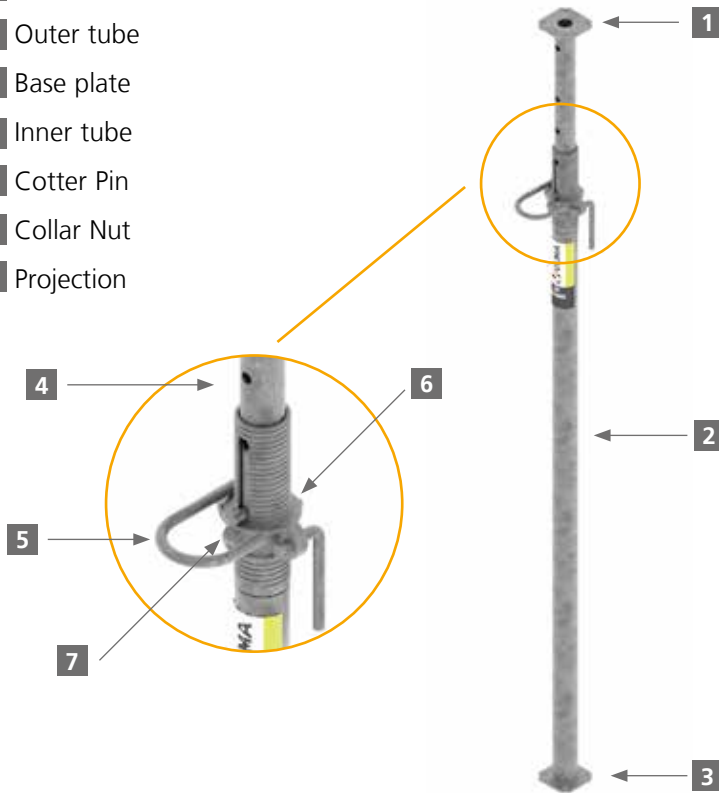

## // Features

- ▶ **Hot-dip galvanized** prop.
- ▶ Range of props:

TP PROP	LENGTH (min. - max.)	WORKING LOADS (max. - min.)
TP Prop 20/250	1.4 m - 2.5 m	30 kN - 20 kN
TP Prop 20/300	1.8 m - 3 m	30 kN - 20.3 kN
TP Prop 20/350	1.9 m - 3.5 m	30 kN - 21.2 kN
TP Prop 20/400	2.3 m - 4 m	30 kN - 21.2 kN
TP Prop 20/450	2.5 m - 4.5 m	30 kN - 20 kN
TP Prop 20/550	3.0 m - 5.5 m	30 kN - 20.3 kN

- ▶ With unintentional disengagement system for the inner tube, cotter pin and collar nut.
- ▶ Collar nut thread designed to ease the evacuation of dirt and concrete remains.

- ▶ Collar nut with projection for simplified adjustment of the prop.
- ▶ **Certified product** in accordance with European standard EN 1065.
- ▶ Safe working thanks to the distance protecting the operator against crushing. (\*)





## // Benefits

▶ **Guaranteed high levels of safety:**

- . Prop certified in accordance with European standard EN 1065.
- . Integrated anti-crush protection.
- . Simple and fast collar nut adjustment.
- . Inner tube, cotter pin and collar nut with unintentional disengagement system.

▶ **Cost-effective** thanks to an optimized design.

- ▶ **High durability for multiple reuse**, thanks to the hot-dip galvanization that provides excellent protection against corrosion.

▶ Simple and quick maintenance.



▶ TP prop with VR TABLES

## // Solutions

- ▶ Compatible with various ULMA slab formwork systems: ONADEK, VR TABLES, ENKOFLEX, CC-4,...




▶ TP prop with ONADEK




▶ TP Prop with ENKOFLEX and CC-4

Basic components		kg
TP Prop 20/250	2200825	13.9
TP Prop 20/300	2200830	17.7
TP Prop 20/350	2200835	20.4
TP Prop 20/400	2200840	25.4
TP Prop 20/450	2200845	30.3
TP Prop 20/550	2200855	37.5

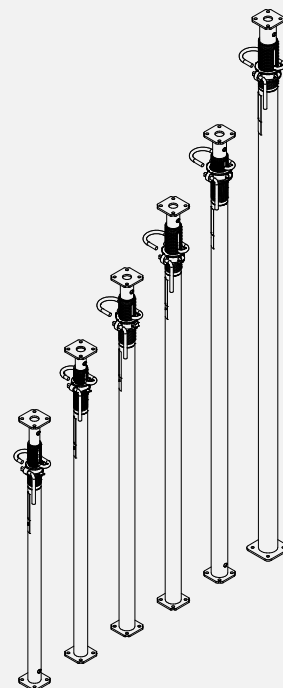

Galvanized steel

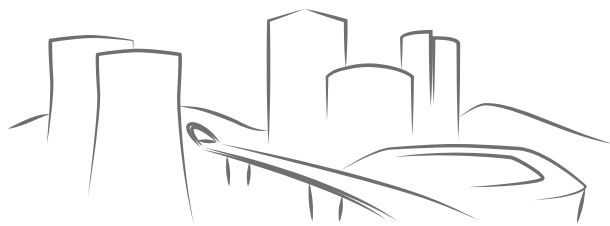

**From the beginning** of your projects



**ULMA C y E, S. Coop.**

Ps. Otadui, 3 - P.O. 13 Box

20560 Oñati, Spain

T. +34 943 034 900

F. +34 943 034 920

01D047ENM

►► [www.ulmaconstruction.com](http://www.ulmaconstruction.com)

**IMPORTANT:**

Any safety provisions as directed by the appropriate governing agencies must be observed when using our products. The pictures in this document are snapshots of situations at different stages of assembly, and therefore are not complete images. For the purpose of safety, they should not be deemed as definitive. All of the indications regarding safety and operations contained in this document, and the data on stress and loads should be respected. ULMA's Technical Department must be consulted anytime that field changes alter our equipment installation drawings. The loads featured in this document, related to the basic elements of the product, are approximate. Our equipment is designed to work with accessories and elements made by our company only. Combining such equipment with other systems is not only dangerous but also voids any or all our warranties. The company

reserves the right to introduce any modifications deemed necessary for the technical development of the product. All rights reserved. Neither all nor part of this document may be reproduced or transmitted in any way by any electronic or mechanical procedure, including photocopy, magnetic recording or any other form of information storage or retrieval system without the written permission.

© Copyright by ULMA C y E, S. Coop